# INSTALLATION INSTRUCTIONS Heated Seat Cover Kit 5B4-F470B-T0 Rhino (All)



## **A**WARNING

Please read and understand these instructions completely before installation to avoid possible injury to yourself or damage to the accessory or vehicle.

#### DEALER:

These instructions contain important information for future reference and *must* be given to the customer.

### WARRANTY INFORMATION:


- Genuine Yamaha components are covered by a one year limited warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.
- The Limited Warranty provided with new Yamaha vehicles has exclusions for certain failures, including those caused by competition or racing use (except YZ and WR motorcycle models) as well as by abnormal strain or abuse. While installation of these components will not "void" your vehicle's warranty, specific failures adjudged by Yamaha to have resulted from the installation of accessory components or other modifications, or from competition use (except YZ and WR motorcycle models), may not be covered by warranty or Yamaha Extended Service.


#### PARTS LIST:

This kit contains the following components. Before beginning installation, confirm there are no missing or damaged components.

Item	Part Number	Description	Qty
	5B4-F470B-T0	Heated Seat Cover Kit	
0	*	Heated Seat Cover (Left)	1
2	*	Heated Seat Cover (Right)	1
3	*	Control Panel	1

\* Part supplied with kit only and not available separately.

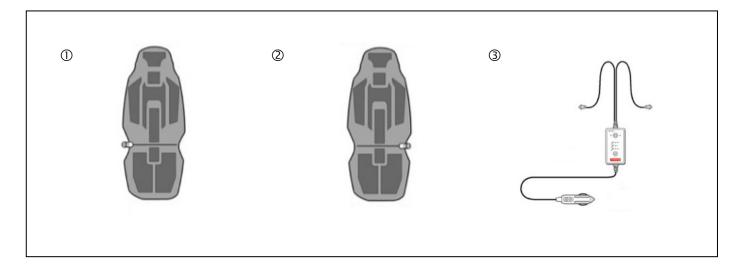

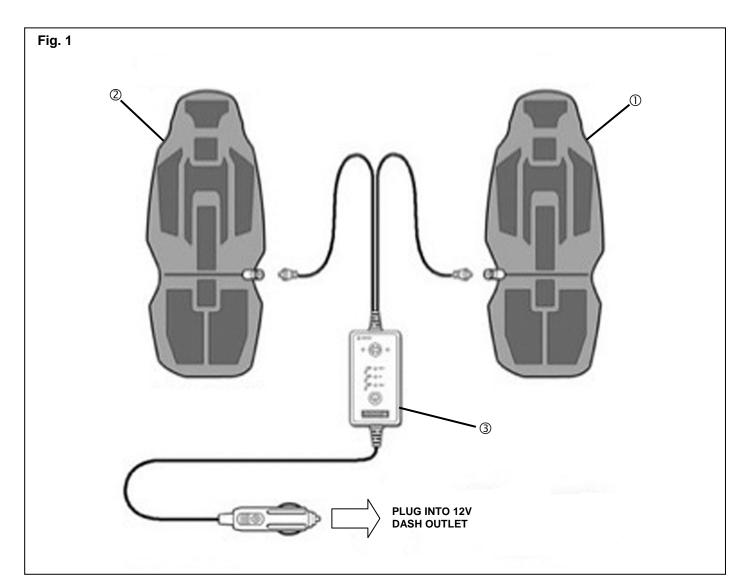

#### **PREPARATION:**

- 1. Place Rhino on a secure level surface and set the parking brake.
- 2. Clean all mounting surfaces before beginning installation.

## **INSTALLATION:**

- 1. Remove both seats from the vehicle (refer to Owner's Manual).
- 2. Drape the seat covers ① & ② over the seats.
- 3. Secure the heated covers ① & ② onto the seats using the elastic bands and the plastic hooks.
- 4. Use Velcro<sup>®</sup> to secure the control panel onto the center console.
- 5. Plug the 12V adapter into the dash outlet.
- 6. Secure the control panel harness using zip ties.

#### CARE AND CLEANING:

Hand wash using a mild soap and water solution. Hang to dry.

#### **CUSTOMER SERVICE:**

For further information, see your Yamaha dealer.

## **ESTIMATED TIME TO INSTALL: 0.1 HRS**