

# Arctic Cat Snowmobile

## Installation Instructions

### 07 Premium Tank Bag (p/n 4639-426)

■ **NOTE:** Read these instructions thoroughly and carefully before beginning the installation process. Retain these instructions for future reference.

Check for the following parts before beginning installation:

Tank Bag, Instruction Sheet, 3/4" Webbing Strap with Female Buckles, Velcro Strap with J-Clip

#### INSTALLATION INSTRUCTIONS

1. Thread the webbing strap with the buckle on it through the seat base as shown in photo 1.

**Note:** This may be difficult but only needs to be done once. Hint: Compress the foam.

2. Reinstall the seat.

3. Attach the side release buckles being sure the protective material is down see photo 3. Slip the elastic over the seat.

4. Attach the top J strap to the side of the plastic pannel on the driver's side of the steering post.

**Note:** For adjustable seats in the tallest position you MUST fold the velcro fastener in half.-see photo 3.

**Maximum carrying capacity-**2 lbs.

**Do not carry sharp or pointed objects.**

**Periodically check and cinch strap connections as necessary**

**While your new Arctic Cat accessory is water resistant, it is not waterproof.**

**It is recommended that items which must be kept dry be placed in a plastic bag or container before loading.**

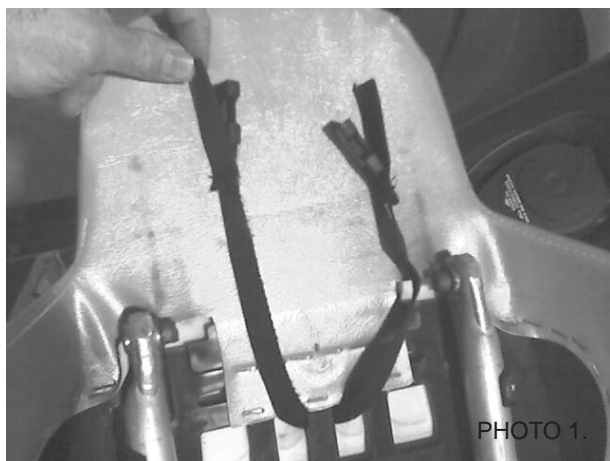


PHOTO 1.



PHOTO 2.

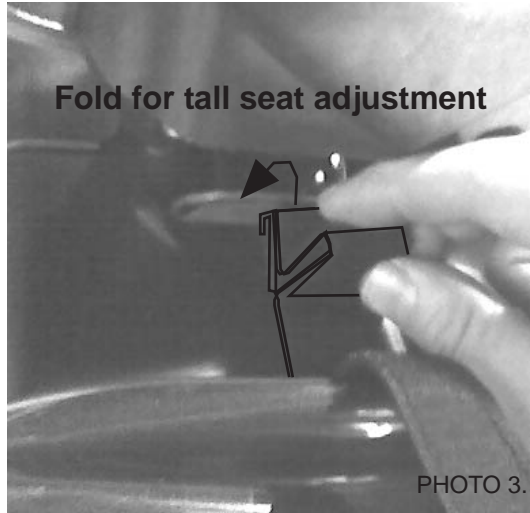


PHOTO 3.



PHOTO 4.



Printed in the U.S.A. ©™ Trademarks of Arctic Cat Inc., Thief River Falls, MN 56701



0804