



INSTALLATION INSTRUCTIONS


Accessory
**PERSONAL WATERCRAFT
COVER**
P/N 08P34-HW5-100

Application
ARX1500T3/T3D

Publications No.
MII 12293
Issue Date
February 2008

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

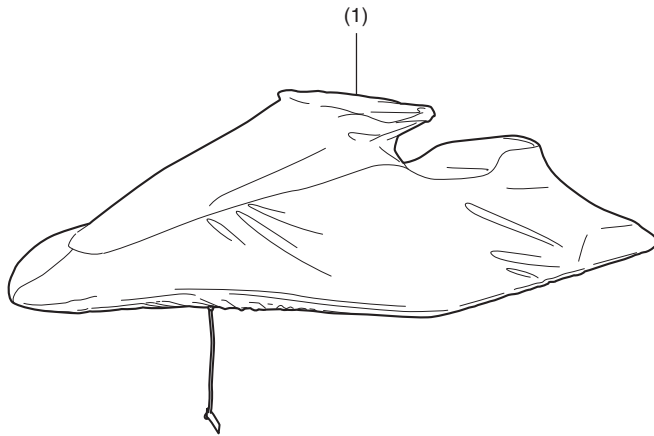

No.	Description	Qty
(1)	Cover	1


TOOL AND SUPPLIES REQUIRED

Scissors
Cigarette lighter


INSTALLATION

INITIAL FITTING PROCEDURE


1. Fit the cover over the handlebars and mirrors.

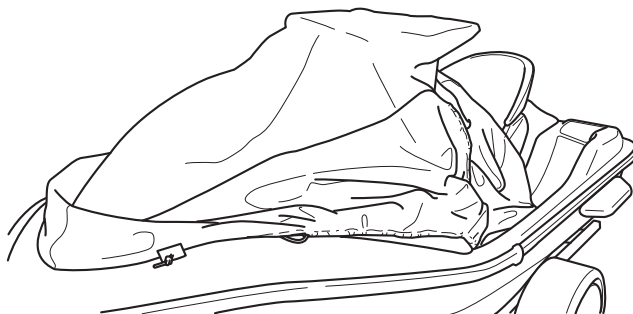


2. Pull the cover completely over the front of the PWC, until it reaches down under the bow. Attach the clips to the gunwale as shown and make sure they are evenly aligned.

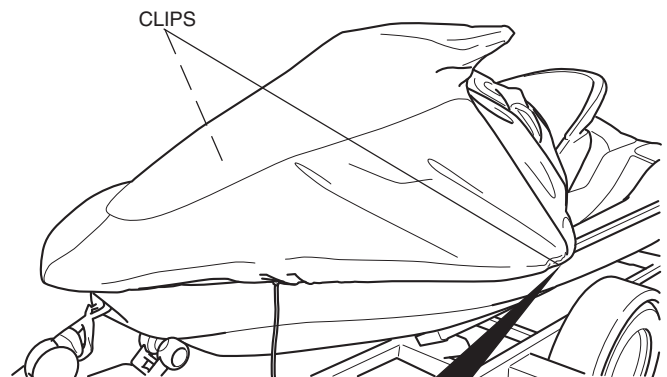


Attach the clips.

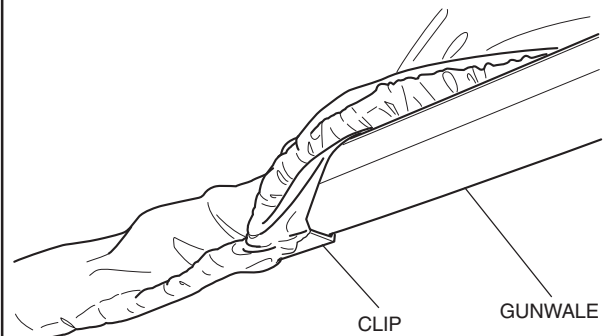


3. Pull the cover completely over the back of the unit one side at a time. Attach all the clips as you go.

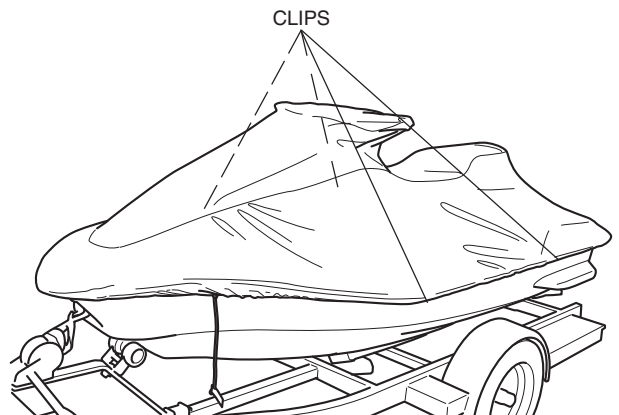


4. Find the knot in the elastic cord located at the front of the cover. Pull the knot and elastic out as far as possible and retie the knot close to the sewn edge of the cover (large enough that it will not slip through the hole).

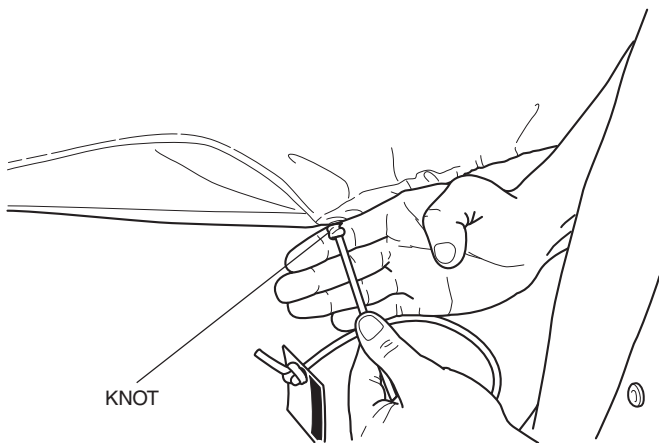


5. Ensure the knot is secure then cut the excess elastic cord.

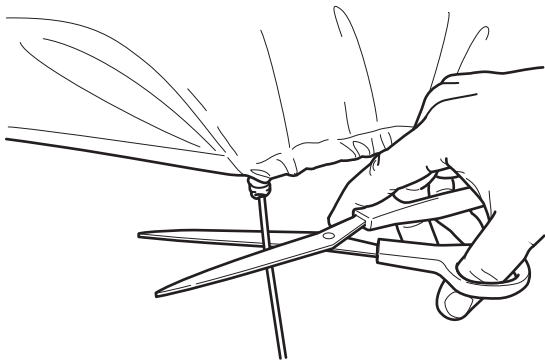

6. Sear the cut end with a cigarette lighter.

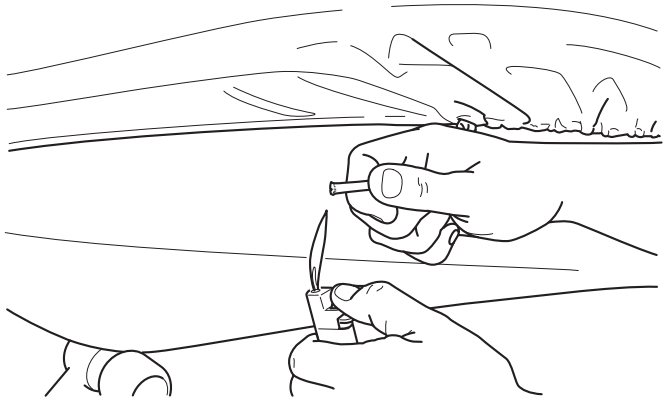

7. Remove the styrofoam plugs from the vacu-vents.

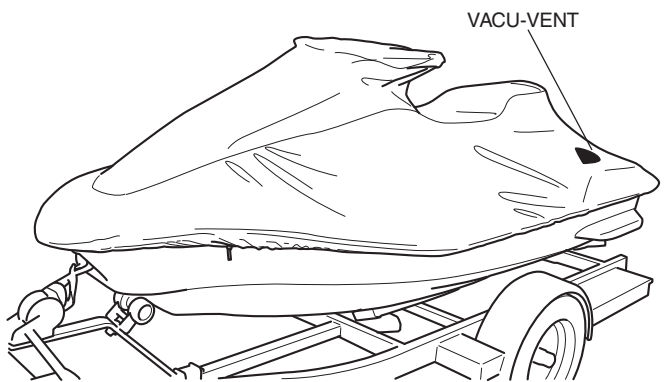

8. To remove the cover, detach the clips, then remove the cover starting at the back of the boat working your way to the front.

NOTICE

Do not remove the cover front-end first; it may damage the cover.