




KIT BAG SOFT SIDED REAR RACK Part #2873324

INSTALLATION INSTRUCTIONS

1. Thread all buckles through appropriate straps, as seen in illustration.
2. Place the bag on rear rack, so that the Polaris logo faces toward the driver.
3. Fit material slots (two) over corners on rack.
4. Fold six material pockets over ends of rack.
5. Feed webbing buckle straps from material slots through each pocket under rack, connect and cinch tight.

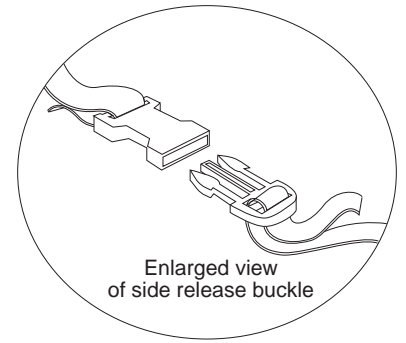

Attach additional cinch straps provided. To install (with bag installed) feed webbing buckle straps through hole in rack, bringing opposite end with buckle through the webbing loop and over the top of the bag. Repeat for opposite side. These cinch straps can be installed at various angles as needed for optimum performance (ie: unsecured or heavy loads).

Caution: Do not carry heavy, sharp, or pointed objects in the rack bag.

Maximum carrying capacity is 10 lbs.

It is recommended after each ride or periodically checking and when necessary cleaning with water the zippered portion of the rack bag.

Residue build up can cause zipper failure.

WARNING! Do not store the ATV outdoors with the rack bag installed. Direct, long term exposure to sunlight will result in fading and/or tendering of the material. It is recommended that the rack bag be removed from the ATV when it is not in use. Damage resulting from extensive exposure to direct sunlight cannot be warranted.

IS2873324/R5


9-22-00



KIT BAG SOFT SIDED REAR RACK Part #2873324

INSTALLATION INSTRUCTIONS

1. Thread all buckles through appropriate straps, as seen in illustration.
2. Place the bag on rear rack, so that the Polaris logo faces toward the driver.
3. Fit material slots (two) over corners on rack.
4. Fold six material pockets over ends of rack.
5. Feed webbing buckle straps from material slots through each pocket under rack, connect and cinch tight.

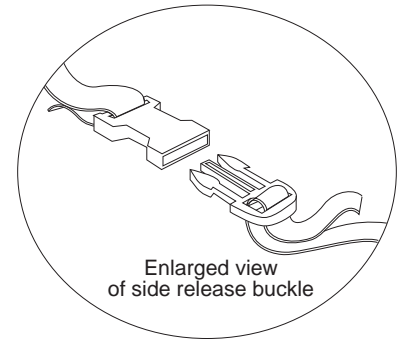

Attach additional cinch straps provided. To install (with bag installed) feed webbing buckle straps through hole in rack, bringing opposite end with buckle through the webbing loop and over the top of the bag. Repeat for opposite side. These cinch straps can be installed at various angles as needed for optimum performance (ie: unsecured or heavy loads).

Caution: Do not carry heavy, sharp, or pointed objects in the rack bag.

Maximum carrying capacity is 10 lbs.

It is recommended after each ride or periodically checking and when necessary cleaning with water the zippered portion of the rack bag.

Residue build up can cause zipper failure.

WARNING! Do not store the ATV outdoors with the rack bag installed. Direct, long term exposure to sunlight will result in fading and/or tendering of the material. It is recommended that the rack bag be removed from the ATV when it is not in use. Damage resulting from extensive exposure to direct sunlight cannot be warranted.

IS2873324/R5

9-22-00
