



INSTALLATION INSTRUCTIONS
Camo Seat Cover Set (Front)
16B-F470B-V0
FX-4



⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury to yourself or damage to the accessory or vehicle.

CAUTION:

This installation should be performed by an authorized Yamaha dealer or a qualified mechanic. Some components require information from the Model's Service Manual for proper installation or adjustment. Be sure to have the Service Manual on hand, if necessary, before proceeding with the installation.

DEALER:

These instructions contain important information for future reference and *must* be given to the customer.

WARRANTY INFORMATION:

- Genuine Yamaha accessories are covered by a one year limited warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.
- The Limited Warranty provided with new Yamaha vehicles has exclusions for certain failures, including those caused by competition or racing use (except YZ and WR motorcycle models) as well as by abnormal strain or abuse. While installation of these components will not "void" your vehicle's warranty, specific failures adjudged by Yamaha to have resulted from the installation of accessory components or other modifications, or from competition use (except YZ and WR motorcycle models), may not be covered by warranty or Yamaha Extended Service.

PARTS LIST:

This kit contains the following components. Before beginning installation, confirm there are no missing or damaged components.

Item	Part Number	Description	Qty
--	16B-F470B-V0	Camo Seat Cover Set (Front)	--
①	*	Seat Cover (Left/Right)	2
②	*	Headrest Cover	2

* Part supplied with kit only and not available separately.

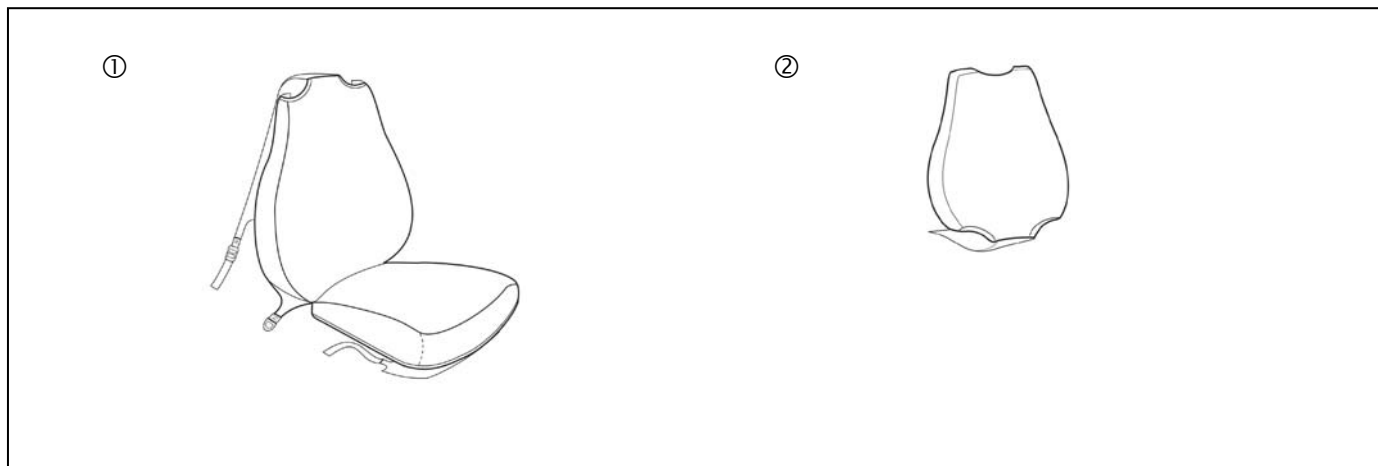


Fig. 1




PREPARATION:

1. Place FX-4 on a secure level surface and set the parking brake.
2. Clean all mounting surfaces before beginning installation.
3. Remove the rider and passenger seat assemblies (refer to Owner's or Service Manual).

INSTALLATION:


1. Place the seat cover ① over the front part of the driver's seat (Fig. 1).
2. Locate the center straps and connect the Velcro® halves together. Feed the straps through the center seat hole as shown in Figures 1 & 2.
3. Fit the seat cover ① around the bottom and top of the seat.

Fig. 2

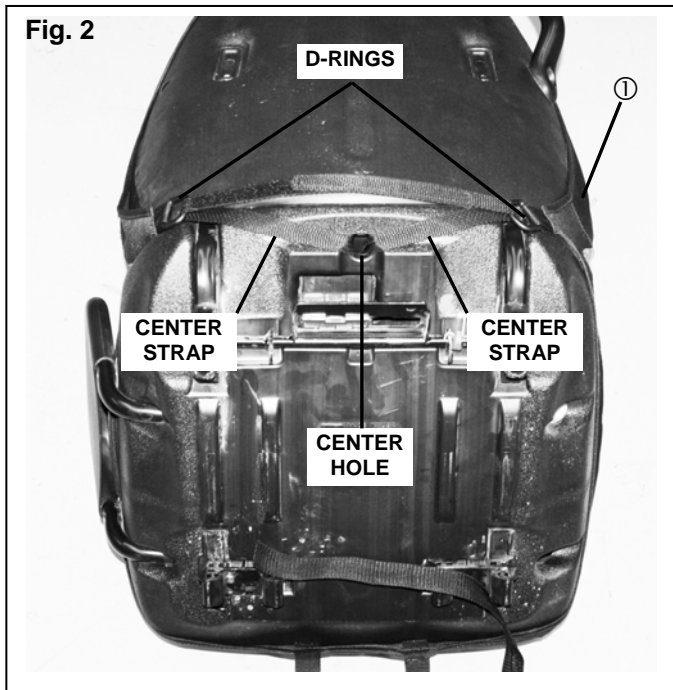


4. Turn the seat up side down and locate the D-rings shown in Figure 2.
5. Separate the center straps and route them through the D-rings (Fig. 2).
6. Cinch the center straps tight and connect the Velcro® halves to secure the D-rings. (Fig. 2).

Fig. 3

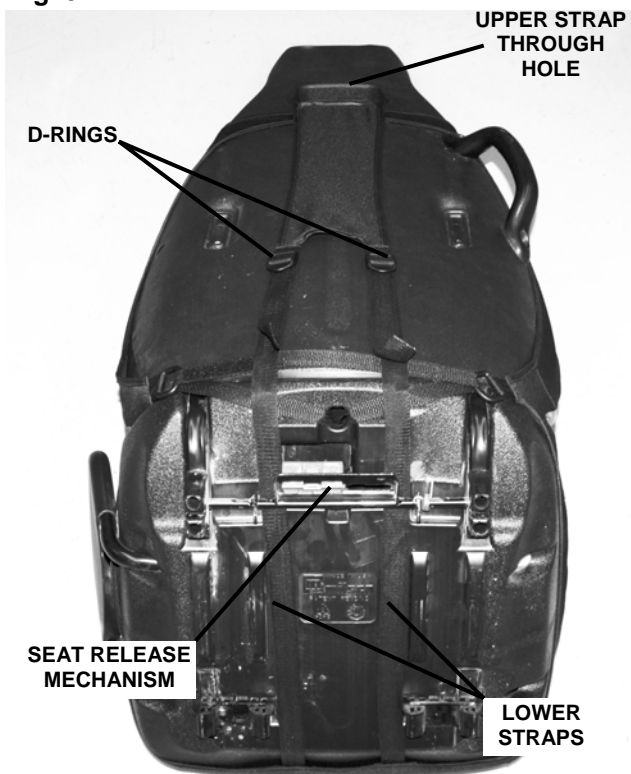

7. Insert upper strap through the hole at the base of the headrest (Fig. 3).
8. Route the lower straps under the seat release mechanism as shown in Figure 3.
9. Feed the lower straps through the D-rings on the upper straps and cinch tight to secure the seat cover in place (Fig. 3).

Fig. 4

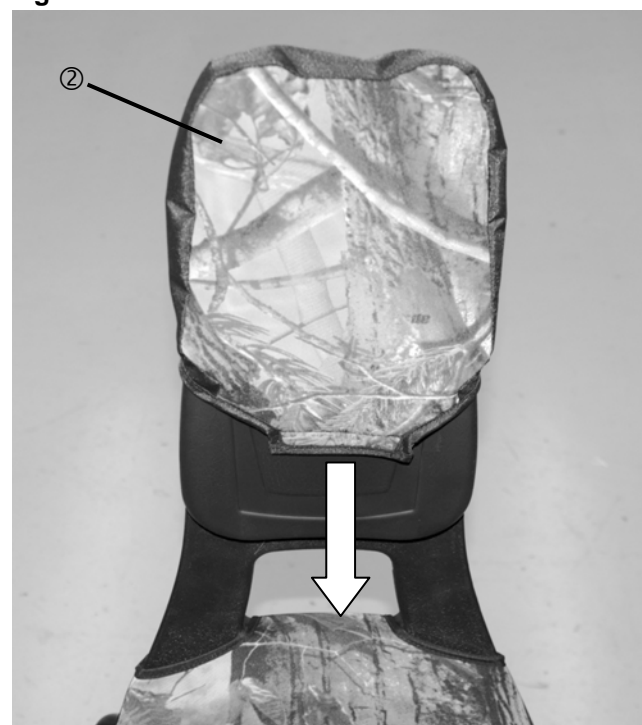

10. Place the headrest cover ② onto the driver's seat headrest and connect the Velcro® halves to secure it in place (Fig. 4).
11. Reinstall the driver's seat (refer to Owner's or Service Manual).
12. Repeat steps 1-10 to install the seat cover ① and the headrest ② onto the passenger seat.
13. Reinstall the passenger seat (refer to Owner's or Service Manual)

CARE AND CLEANING:

Do not machine wash or dry. Wash using only cold water and avoid using harsh detergents. Hang to dry.

CUSTOMER SERVICE:

For further information, see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.3 HRS