

INSTALLATION INSTRUCTIONS Camo Seat Cover Set (Rear) 16B-F470C-V0 FX-4



	A	WARNIN	G
--	---	--------	---

Please read and understand these instructions completely before installation to avoid possible injury to yourself or damage to the accessory or vehicle.

-	_	•	_	_	-	•	
C	л			•	•	ını	
	_		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	•	•		м

This installation should be performed by an authorized Yamaha dealer or a qualified mechanic. Some components require information from the Model's Service Manual for proper installation or adjustment. Be sure to have the Service Manual on hand, if necessary, before proceeding with the installation.

DEALER:

These instructions contain important information for future reference and *must* be given to the customer.

WARRANTY INFORMATION:


- Genuine Yamaha accessories are covered by a one year limited warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.
- The Limited Warranty provided with new Yamaha vehicles has exclusions for certain failures, including those caused by competition or racing use (except YZ and WR motorcycle models) as well as by abnormal strain or abuse. While installation of these components will not "void" your vehicle's warranty, specific failures adjudged by Yamaha to have resulted from the installation of accessory components or other modifications, or from competition use (except YZ and WR motorcycle models), may not be covered by warranty or Yamaha Extended Service.

PARTS LIST:

This kit contains the following components. Before beginning installation, confirm there are no missing or damaged components.

Item	Part Number	Description	Qty
	16B-F470C-V0	Camo Seat Cover Set (Rear)	
①	*	Upper Seat Cover	1
2	*	Lower Seat Cover	1
3	*	Headrest Cover	2

^{*} Part supplied with kit only and not available separately.

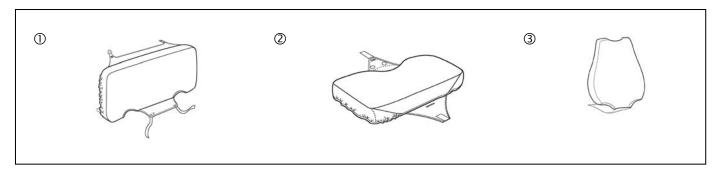




PREPARATION:


- 1. Place FX-4 on a secure level surface and set the parking brake.
- Clean all mounting surfaces before beginning installation.

INSTALLATION:


- 1. Fit the upper seat cover ① over the upper half of the rear seat (Fig. 1).
- 2. Locate the center straps and feed them through the gap between the seats and into the cargo area (Fig. 1).

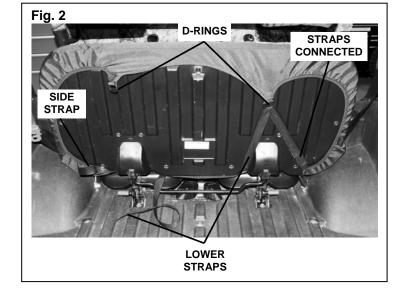


- 3. Locate the D-rings shown in Figure 2.
- 4. Route the lower straps through the D-rings and connect them to the side straps as shown in Figure 2.

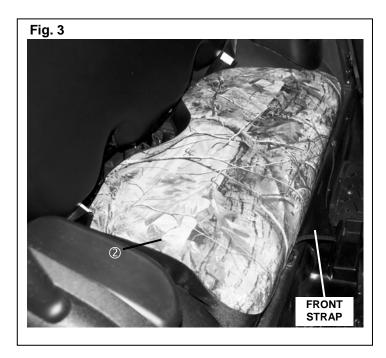

- 5. Fit the lower seat cover ② over the lower half of the rear seat (Fig. 3).
- 6. Feed the front strap under the rear seat (Fig. 3)
- 7. Fold the rear seat by releasing the locking mechanism in the cargo area (refer to Owner's Manual).

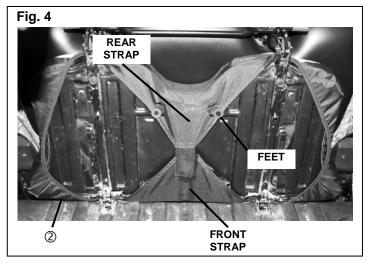

- 8. Connect the front and rear Velcro® straps to secure the lower seat cover ② in place.
- 9. Make sure the feet on the seat underside protrude though the holes in the lower seat cover ② (Fig. 4).

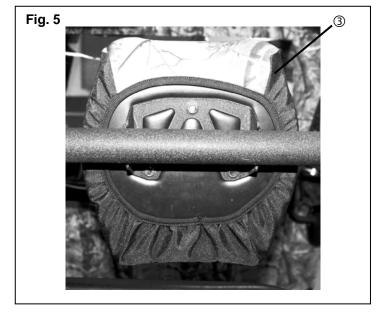

10. Install the headrest covers ③ over the rear seat headrests as shown in Figure 5.

CARE AND CLEANING:

Do not machine wash or dry. Wash using only cold water and avoid using harsh detergents. Hang to dry.

CUSTOMER SERVICE:

For further information, see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.3 HRS