



# EXCITER MOORING COVER (Red/Blue)

Part No. MWV-EXCMC-RD-00 (Red) & MWV-EXCMC-BL-00 (Blue)

Your new YAMAHA Jet Boat cover is quite unique. It was carefully designed by Commercial Sewing, Inc. and Yamaha to accommodate both mooring and trailering, with Bimini option and without.

1. A special anti-pooling system is included to prevent large puddles from ruining your cover.
2. The SurLast® all-weather fabric was chosen to allow stability, water repellency and breathe-ability.
3. The Vacu-Hold system allows trailering at highway speeds (65 mph) without billowing or buffeting.
4. The new ratchet and drawstrap type attachment will allow easy, tight and secure installation.

## CARE, WARRANTY AND INSTALLATION INSTRUCTIONS

**Hint-**To properly install ratchet strap system.

1. Pull the webbing through the channeled ratchet cylinder and tension while ratcheting to "start" the webbing.
2. Tension the ratchet with about 5 lbs. of pressure (pinky finger). Pull the sides of the cover to even the webbing throughout. Re-tension about 5 lbs. (the ratchet should be tight on the side of the boat lever, perpendicular to the hull).
3. Crank the ratchet approximately 5 full additional times to add tension (based on an 18' boat).
4. Check boat webbing for tension during stops while trailering. (webbing may stretch during first installation and use CHECK OFTEN).

**WARNING:** Readjust and retighten the cover after trailering and before storage. To prevent pooling do not allow snow and ice to accumulate on the cover. Never trailer at speeds above the speed limit.

**CARE INSTRUCTIONS-** Wash with warm soapy water (while installed if possible) and allow to air dry. For stubborn stains, mild detergent is recommended.

Storing the boat in constant direct sunlight will shorten the life of the cover and the components used to construct it. We recommend storing the boat in a location that exposes it to some sun and also shades it throughout the day. Preferably morning sun and afternoon shade.

**WARRANTY-** This cover includes a 90 day warranty from date of purchase against any defects in material or workmanship. If you incur any problems or have any comments please contact your Yamaha dealer or call Commercial Sewing Customer Service directly at (860) 482-5509.

### PROPER INSTALLATION-

#### A. Pooling System Installation:

Install pooling system as per Fig. 1 putting the colored webbing to the two front handles, the other two adjustable buckles to the two rear cleats and tighten adjustable buckles.

#### B. Proper Cover Installation:

- Place cover on boat starting at front, use cleats as buttons to keep cover in place, work toward back over pooling system until back cleats are "buttoned" in place.
- Thread the two rear trailering straps to the rear of the cover as seen in Fig. 2 below. Attach and tighten down around the gunwale.
- Maneuver in place until cover fits over gunwale.
- Begin ratcheting by unzipping ratchet pocket and pulling ratchet handle in right-to-left motion until zippered ratchet pocket no longer sags but rests against the hull.
- Pull on webbing to even the tension around the cover and again tighten the ratchet until it does not sag but rests against the boat. Tighten ratchet four to five more times. The ratchet should be very hard to pull with your pinky finger.

**Note:** Proper installation and operation of this cover requires that it be very tight at the gunwale. At this point re-tighten by pulling ratchet handle securely. **BE SURE** cover is installed below gunwale before final ratchet adjustment. ZIP ratchet pocket closed for final installation.

**Warning:** Zippered ratchet mechanism should be hand tightened only. Do not pry or attempt to operate ratchet mechanism with any type of tool.

### REMOVAL-

- Zip open ratchet pocket.
- Follow instructions on ratchet label to release pressure.
- Once pressure is released pull out webbing to allow simple future installation, then close handle and ZIP POCKET closed (this is important to prevent damage in future installation).
- Remove and fold cover working from rear to front.

### POOLING POLE STORAGE-

- Disconnect pooling poles from either the front (colored webbing) or back.
  - After disconnecting collapse poles by pushing buttons and telescoping them down.
- Wrap webbing around poles and install in bag provided.

Fig. 1

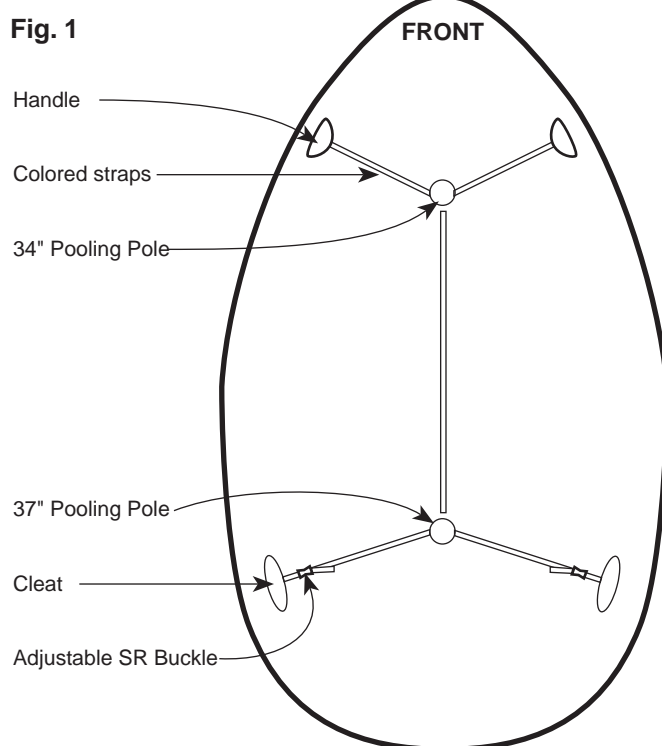


Fig. 2

