

Important
Warranty Information
and Installation Instructions
CUSTOM & DELUXE COVER

Please read and understand the instructions completely before installation to avoid any possible injury to yourself or damage to the accessory or your snowmobile.
DEALER: These instructions contain important information for future reference and must be given to the customer.

1. PARTS LIST:





ITEM	PART NAME	DESCRIPTION	QTY.
1	INSTRUCTION SHEET	PAPER	1
2	YAMAHA SNOWMOBILE COVER	CANVAS OR SURLAST™ POLY MATERIAL	1
3	UNDERCOVER	POLYESTER MATERIAL (FOR DELUXE COVER)	1
4	TIE-DOWN HOOKS	POLY/VINYL COATED CRS	4

Your new Yamaha Snowmobile Cover has been carefully manufactured of the finest quality materials available. It has been designed specifically for winter use with coordinating sled graphics and safety ties for trailering.

SOME MODELS: Your new cover has an "expandable" windshield panel. Should you now, or at a later date, wish to purchase one of Yamaha's optional windshields, the cover will adjust to fit.

DELUXE COVERS: For added protection for your machine, your new Deluxe Cover comes with a special undercover lining meant to protect your cab area against scratching and marring. To install your new undercover, see Fig. 1. The undercover will either be placed over the handlebar or behind the windshield depending on the windshield you have. For the FX chasis feed the elastic strap around the foot stirrup tube and connect the hook back to the elastic (see photo 1.) When installing your cover over the undercover be sure the undercover does not shift. Attach the tabs provided to the hood and connect to the undercover. The undercover is separate from the Deluxe Cover so that it may be removed and washed FREQUENTLY. Please wash this undercover whenever it becomes dirty. Dirt and grit will harm the surface of your machine.

2. TRAILERING If trailering sled it is necessary to attach side hooks with approx. 20 lbs. pressure (See Fig. 2). To secure cover for trailering, pull cover down over spindle and clip the side-release buckles behind the ski-spindle on the front suspension, (See Fig. 3) *hint it is easier to do if the cover is not completely over the back of the seat. **NOTE:** For some covers; wrap and connect velcro strap around spindle, (See Fig. 4). Attach rear and then side adjusta-buckles to the rear suspension, pull rear strap downward and back. Pull on the side to check tension and eliminate slack. Pull from over the spindle area if necessary then re-tension the rear strap. For some VK models there is a strap in the front of the cover. This strap is for the front rack to be removed at the operators discretion and the strap can be cinched down over the excess material. To release buckles- Gently lift up on the lip of the adjusta-buckle. **WHILE TRAILERING: BE SURE TO CLOSE GAS CAP OPENING. CHECK FOR FLAPPING AND BUFFETING.**

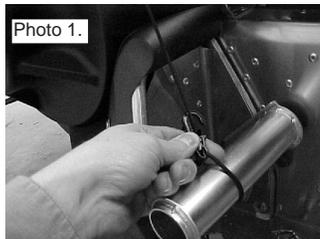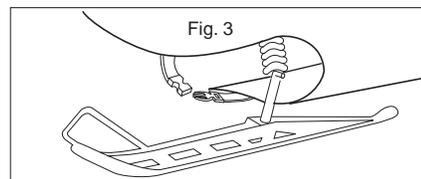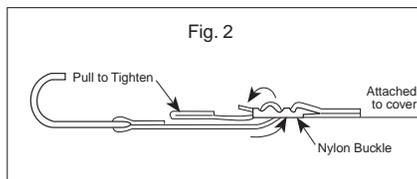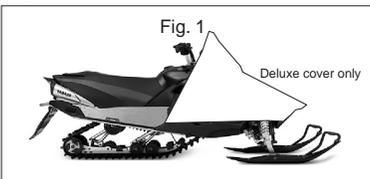

3. CARE & CLEANING

Remove tie straps and hose down thoroughly both inside and out to remove all road salt and dirt.

Reinstall cover after clothesline drying. (Do not machine dry.) Do not store machine in direct sun with this cover on. Either remove cover or shade machine and cover. A breakdown of dyes and fiber due to prolonged exposure to direct sunlight cannot be covered under warranty.

4. WARRANTY

Your new Yamaha Cover is guaranteed against defective material and workmanship for one year from the date of its purchase. Should you have a problem of any kind, please contact your dealer. No warranty card is necessary.

Note: Damage due to "whipping" is not covered - Please be sure that your cover does not whip while trailering!

*HINTS FOR INSTALLATION: (SEE ILLUSTRATIONS)


To prevent hooks from catching when installing the cover, place the end of the hook between the stitches in the webbing after hook is removed from suspension.

Open and close gas cap before trailering placing the tab of the zipper slide between the two pieces of velcro.

Do not use cover on the wrong machine!

Check cover tension periodically during trailering. Loose or flapping cover will cause damage! For covers with visable elastic to be installed on shorter tracks such as Venture, it is suggested for extra tension and better performance to adjust the elastic sewn into the cover to be taught before trailering do so by installing the cover, pulling the knot in the elastic as far out as possible and retie the knot large enough not to slip inside the sewn edge. Check to see if the cover can be removed and reinstalled at the rear. Cut and sear the edge with a lighter.

Carefully read and understand instructions before trailering.

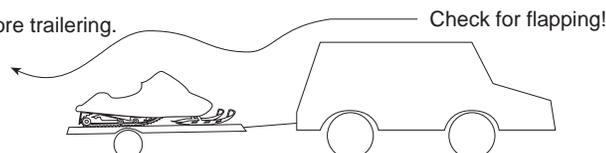

Attach end of hook between the stitches

Open & close placing the tab of the zipper between the two pieces of velcro.

